


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.03.13.
2	설계변경접수등록 201404-0003 적용	S.L.SON	J.H.YOUN	2014.04.10.

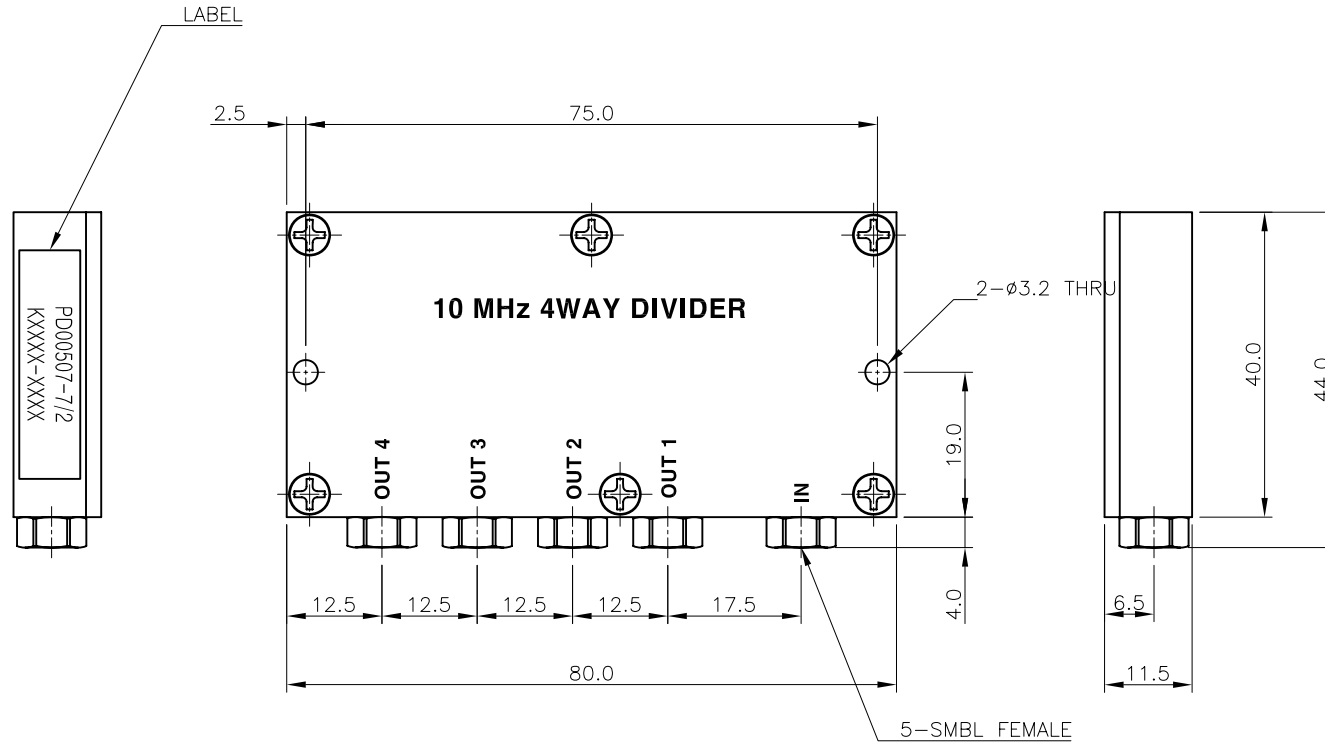

* ELECTRICAL SPECIFICATIONS

Frequency Range : 10.0MHz
Insertion Loss (Max.) : 7.2dB
V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Gold Plate)
CONNECTORS PINS :
Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS

MARKING COLOR : BLACK

TOLERANCE	Decimal ± 0.3	DATE 2014. 04. 10.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	KJ COMTECH CO.,LTD. TITLE 4WAY POWER DIVIDER
		DRAWN BY	T.J.KIM	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00507-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	