



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration (2018.03.07 주파수대역 추가)	S.L.SON	J.H.YOUN	2020.01.30.

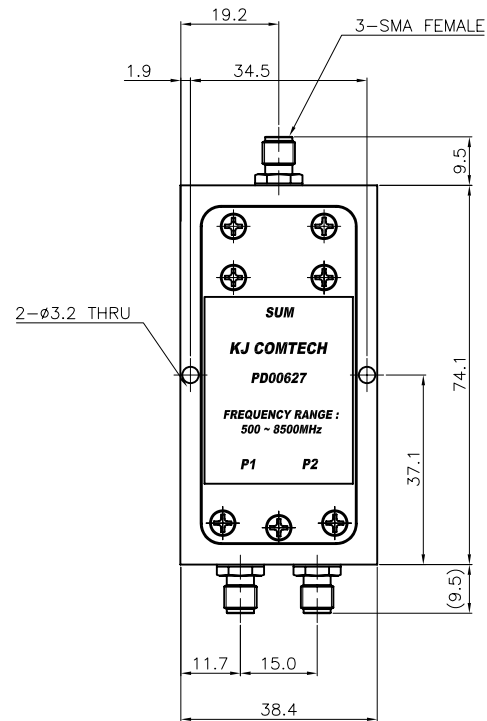

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500.0 ~8500.0MHz
V.S.W.R (Max.) :
0500 ~ 3000MHz : 1.4:1
3000 ~ 8.500MHz : 1.5:1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω
Insertion Loss(Max.) : 4.0dB

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper
(Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2020. 01. 30.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061	FINISH White Chromate	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY S.L.SON		
SCALE 1/1		UNIT mm	DWG NO. PD00627-7/1	REVISION 1
			SHEET 1 of 1	