
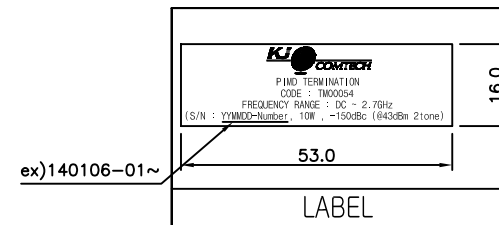
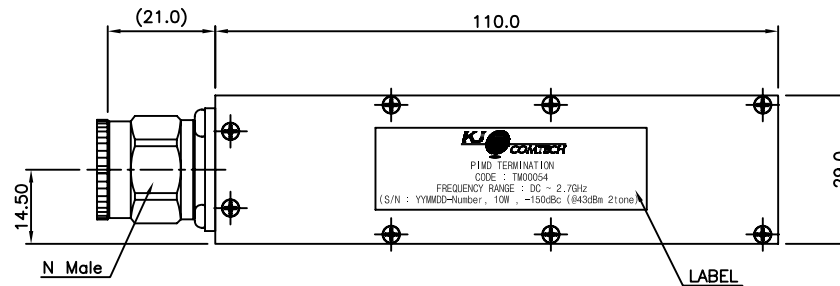


REVISION			
REV	DESCRIPTION	DRAWN	APPR
1	Initial Registration	I.C.KIM	I.C.KIM
			DATE
			2014.01.06.

PLASTIC DUST CAP



* ELECTRICAL SPECIFICATIONS

Frequency Range : DC ~ 2.7GHz

V.S.W.R (Max.) : 1.25 : 1

Impedance : 50Ω

Passive IMD (Max.) : -150dBc (@43dBm 2tone)

-CDMA : F1 (869 MHz)

F2 (891.5 MHz)

IM3 (846.5 MHz)

-WCDMA : F1 (1930 MHz)

F2 (1990 MHz)

IM3 (1870 MHz)

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (SUCO Plate)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017					
	±0.3	2014. 01. 06.							
MATERIAL	Angle	APPROVED BY	I.C.KIM		TITLE				
	±1°	CHECKED BY	E.H.KIM						
FINISH	A6061 T6	DRAWN BY	I.C.KIM		N50-P-DUMMY				
SCALE		1/1	UNIT	mm		A3	DWG NO.	TM00054-7/3	
							REVISION	I R	SHEET