
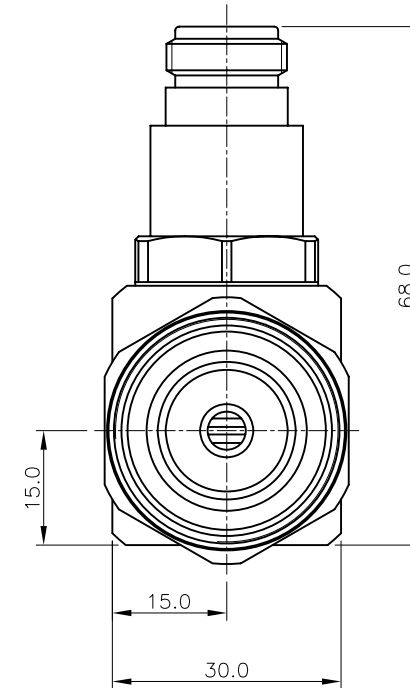


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.22.
2	LOGO 변경 (KJ컴텍)	S.L.SON	J.H.YOUN	2014.10.14.

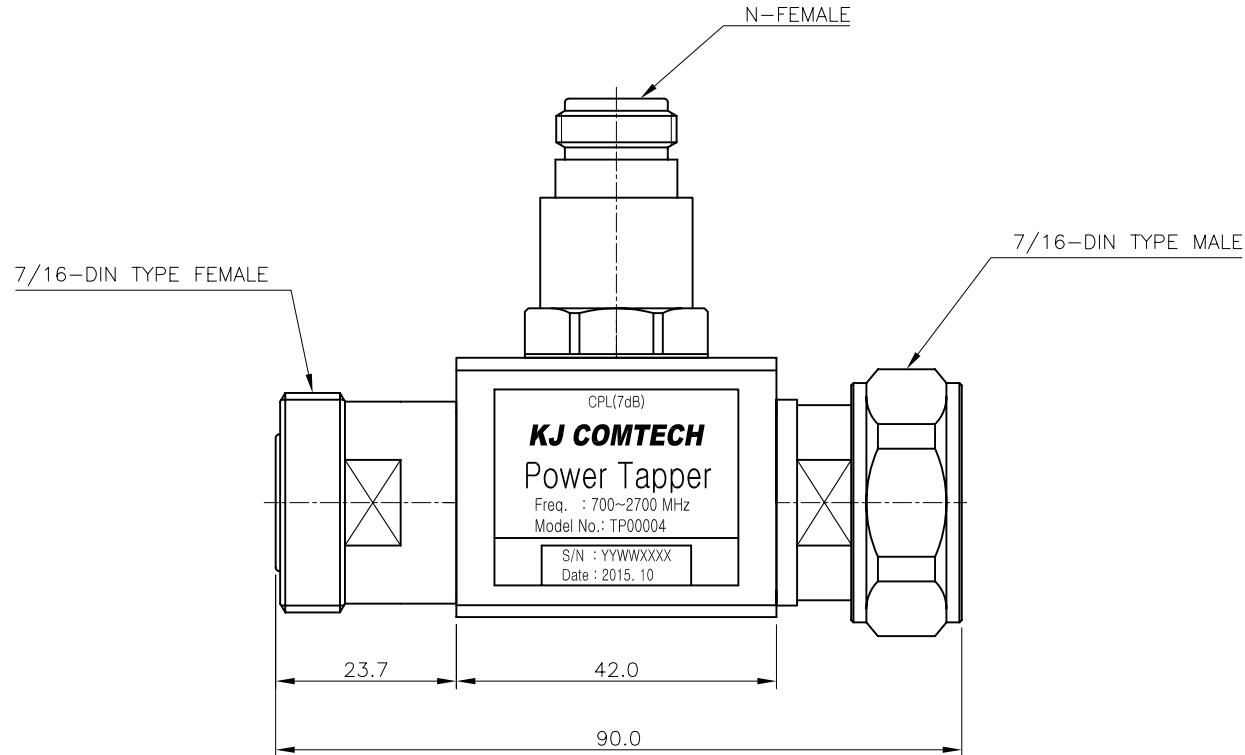


*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 700.0 ~ 2700.0MHz
 Tap Loss (Input <-> P2) : 7.0±0.8dB
 Insertion Loss (Input <-> P1) : 1.5dB(Max)
 Input V.S.W.R (Max.) : 1.4 : 1
 PIM (@43.0dBm 2Tone) : -155.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : MBsBD (SUCO Plate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2015. 10. 14.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
	±0.3	CHECKED BY	T.J.KIM		
MATERIAL	MBsBD	DRAWN BY	S.L.SON		TITLE 7dB POWER TAPPER
FINISH	SUCO PLATE	SCALE	UNIT		A4
		1/1	mm		