


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.02.26.

* 인쇄 사양
인쇄색상 : BLACK
글씨체 : 굴림 (굵게, 높이 4mm)

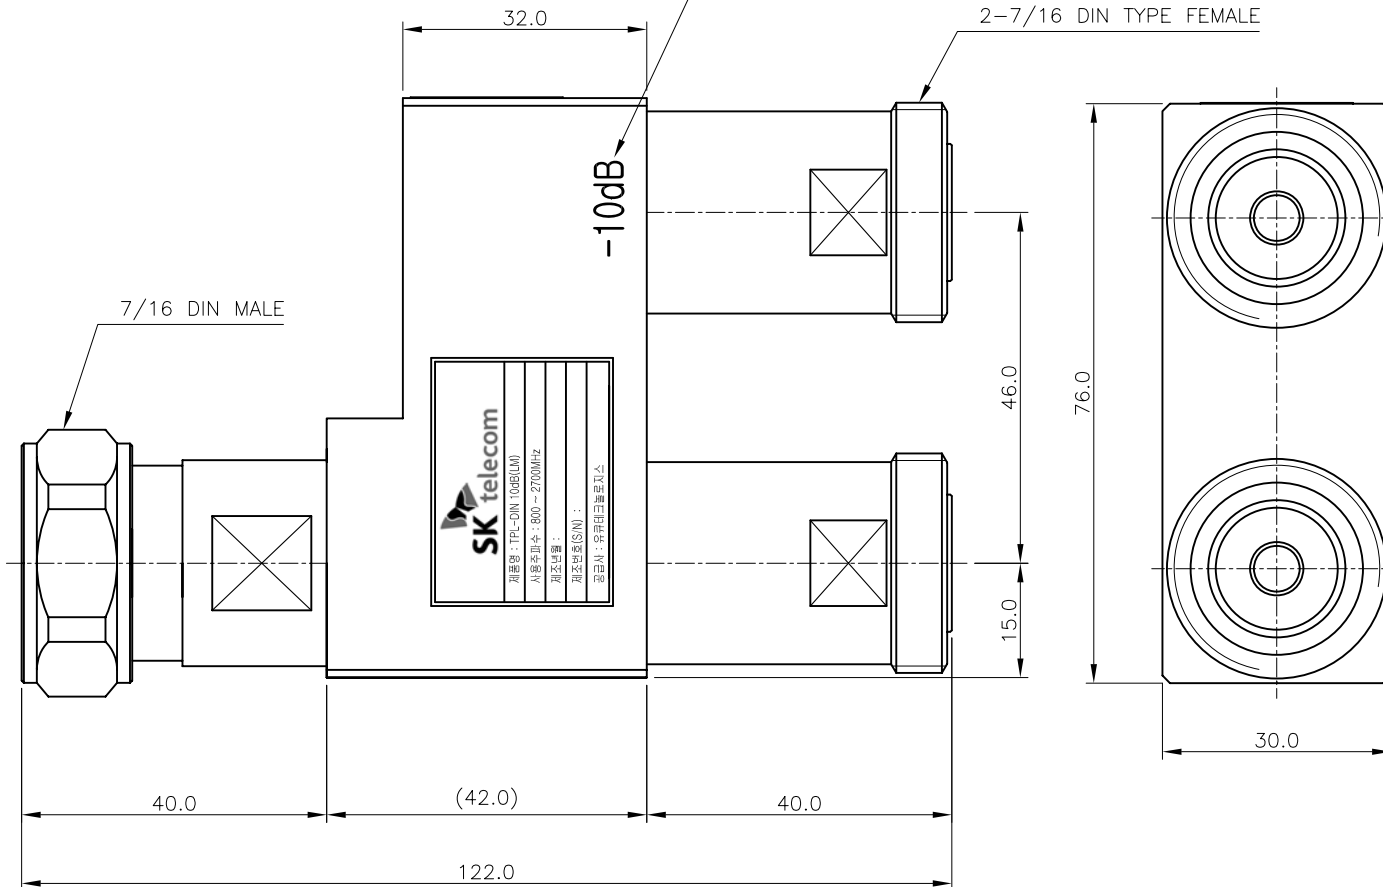

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2700.0MHz
Tap Loss (Input <-> P2) : 10.0±0.8dB
Insertion Loss (Input <-> P1): 1.0dB(Max)
Input V.S.W.R (Max.) : 1.35 : 1
PIM (@43.0dBm 2Tone) : -155.0dBc
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061
CONNECTORS : MBsBD (SUICO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2015. 02. 26.				
	Angle	APPROVED BY	J.H.YOUN			
	±1°	CHECKED BY	T.J.KIM			
MATERIAL	A6061	DRAWN BY	S.L.SON			
FINISH		SCALE	UNIT			
DIC-547	1/1	mm				
		TITLE			10dB POWER TAPPER	
		A4			DWG NO.	TP00017-8/1
					REVISION	1
					SHEET	1 of 1