



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.03.04.

* 인쇄 사양
인쇄 색상 : BLACK
글씨체 : 굴림 (굵게, 높이 4mm)

2-7/16 DIN TYPE FEMALE

-10dB

7/16 DIN MALE

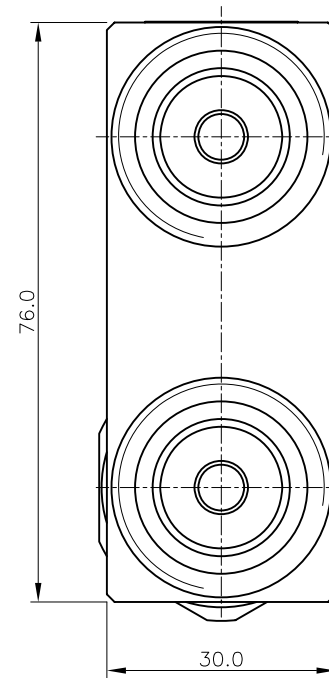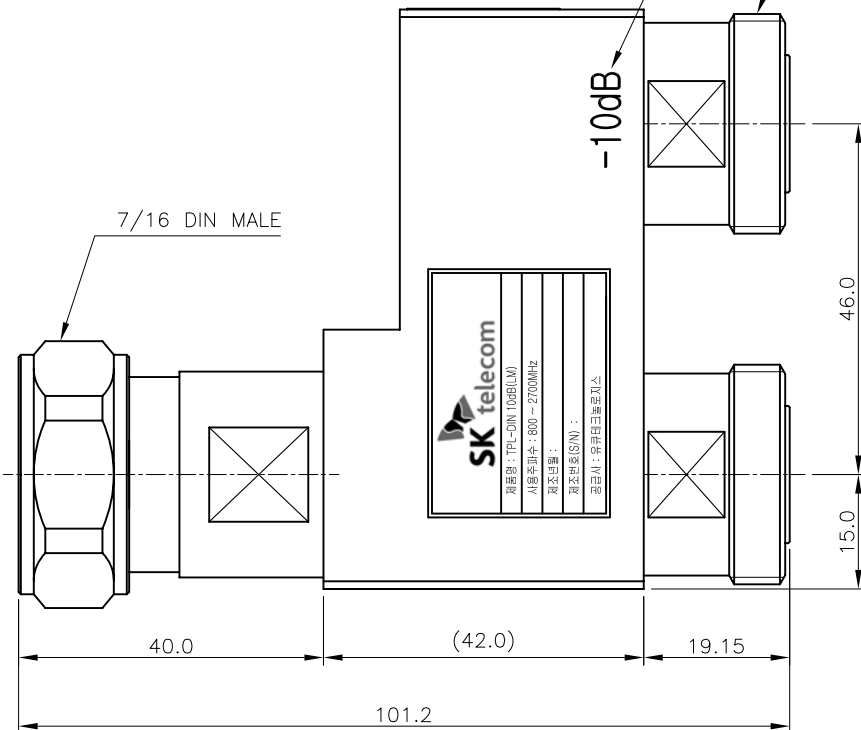

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2700.0MHz

Tap Loss (Input <-> P2) : 10.0 ± 0.8 dB

Insertion Loss (Input <-> P1) : 1.0dB(Max)

Input V.S.W.R (Max.) : 1.35 : 1

PIM (@43.0dBm 2Tone) : -155.0dBc

Power Handling (Max.) : 100.0W

Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061

CONNECTORS : MBsBD (SUCO Plate)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2015. 03. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	$\pm 1^\circ$	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 10dB POWER TAPPER
	A6061	DRAWN BY	S.L.SON	
FINISH	DIC-547	SCALE	1/1	A4 DWG NO. TP000020-8/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	