


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 12. 13.

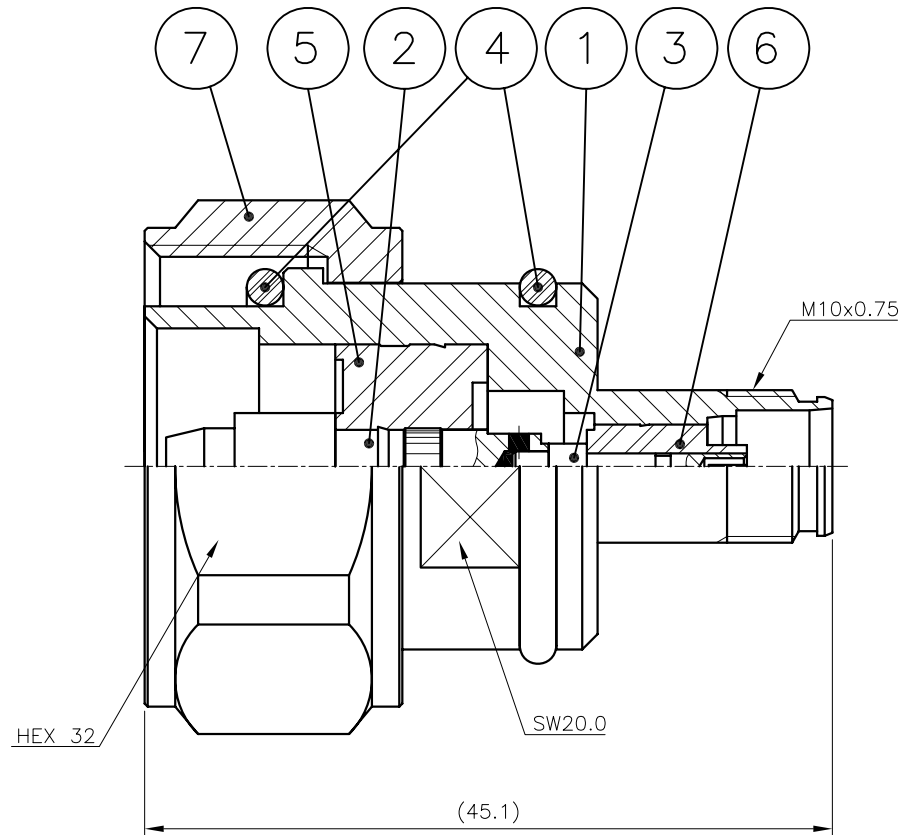

* 전기적 특성

1	Frequency range	DC ~ 6GHz
2	Impedance	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max @ 6GHz
4	Insertion Loss	-0.2dB min
5	PIMD	166dBc (Min) (20W*2Tone)

7	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00078-5/2
6	INSULATOR	1	TEFLON		DIN02956-N/2
5	INSULATOR	1	TEFLON		DIN01680-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	CONTACT	1	BeCu C17300	Silver(5μm)	DCT03894-5/2
2	CONTACT	1	MBsBD C3604BD-F	Silver(5μm)	DCT03893-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO	DAD00351-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 12. 13.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (P) NEW10 (J) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	2/1	DWG NO. AD00625-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	