


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.11.14.
1	I/L 특성개선 PIN 도금두께 변경	S.Y.EUN	I.C.KIM	2019.02.12.

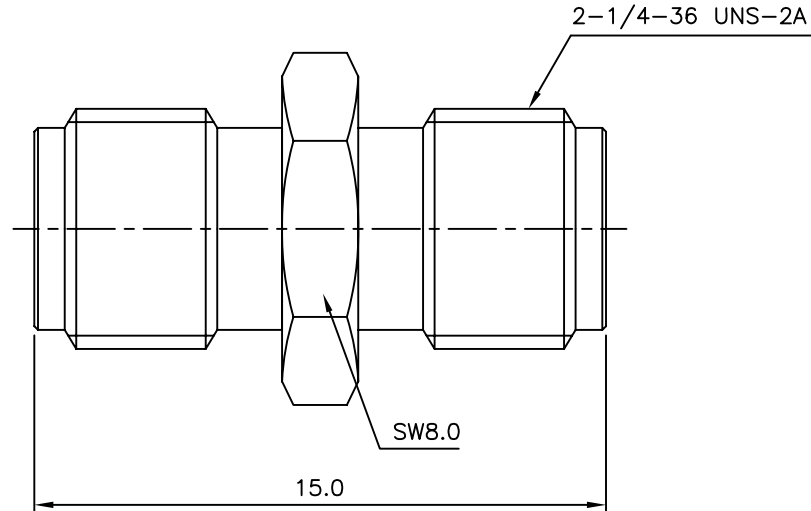

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

4	INSERT	1	SUS303	Passivate	DIS00283-5/G
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate 1.3μm	DAC03311-5/5
1	BODY	1	SUS303	Passivate	DAD00343-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM		
MATERIAL	±1°	CHECKED BY	TITLE 2.92mm (J) 2.92mm (J) ST ADAPTOR		
	_____	DRAWN BY			
FINISH	_____	SCALE	UNIT		A4
	_____	5/1	mm		
				REVISION 1	SHEET 1 of 1

A4