


CF00977-7/1

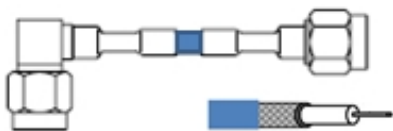

**SMA-PL+SMA-PS
+85FJ(BLUE)**

SMA PL 85TP ONE/BODY
BO/GO, PI/GO, CH/BR/NI
SMA PS 85TP
BO/GO, PI/GO, CH/BR/NI

CF00977-7/1 240mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

**240mm - S11/S22/S21
(SWR, SWR, dB)**

■_1.0GHz	- 1.06, 1.06, 0.23
■_2.0GHz	- 1.08, 1.08, 0.36
■_3.0GHz	- 1.10, 1.09, 0.46
■_4.0GHz	- 1.10, 1.10, 0.57
■_5.0GHz	- 1.07, 1.06, 0.63

■_6.0GHz	- 1.24, 1.22, 0.82
■_7.0GHz	- 1.33, 1.24, 1.06
■_8.0GHz	- 1.34, 1.21, 1.14

► **NETWORK ANALYZER**

► **Test cable**

► **Test Adaptor**

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

