



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.07.03.

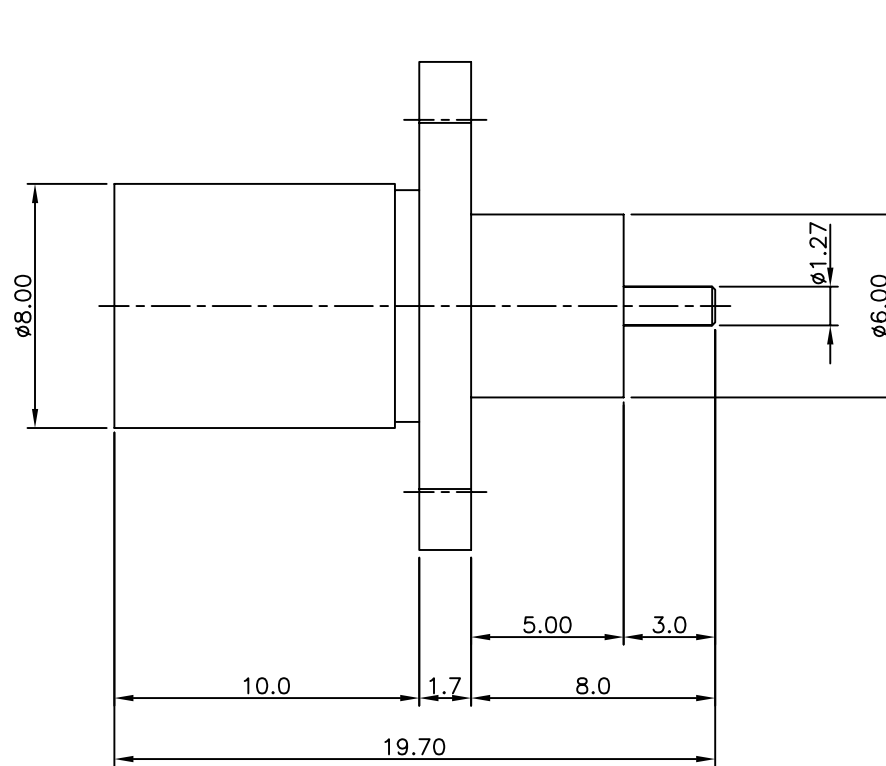

CAP 조립 시 반듯이 핸드프레스 사용 할 것.

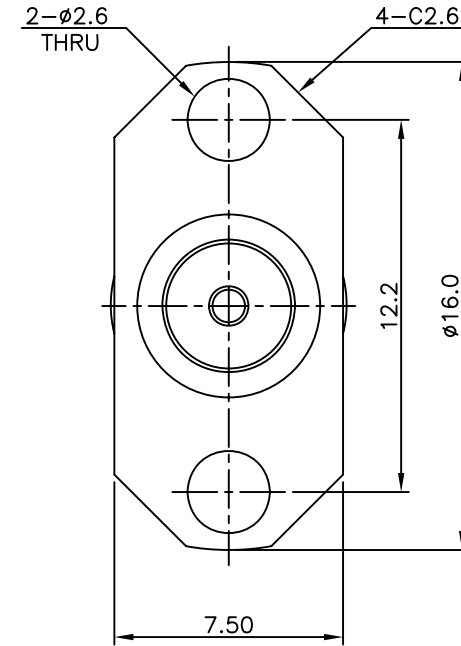

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)

5	SPRING RING	1	BeCu C17300	Nickel Plate	DSR00007-5/1
4	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02214-5/1
3	INSULATOR	1	TEFLON		DIN02238-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02921-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03497-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 07. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE PDM(Φ5.5) SOLDER END PS-2H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	A4 DWG NO. CN03067-7/5 REVISION I R SHEET 1 of 1
		4/1	mm	