


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration			S.Y.EUN	I.C.KIM	2019.09.05.

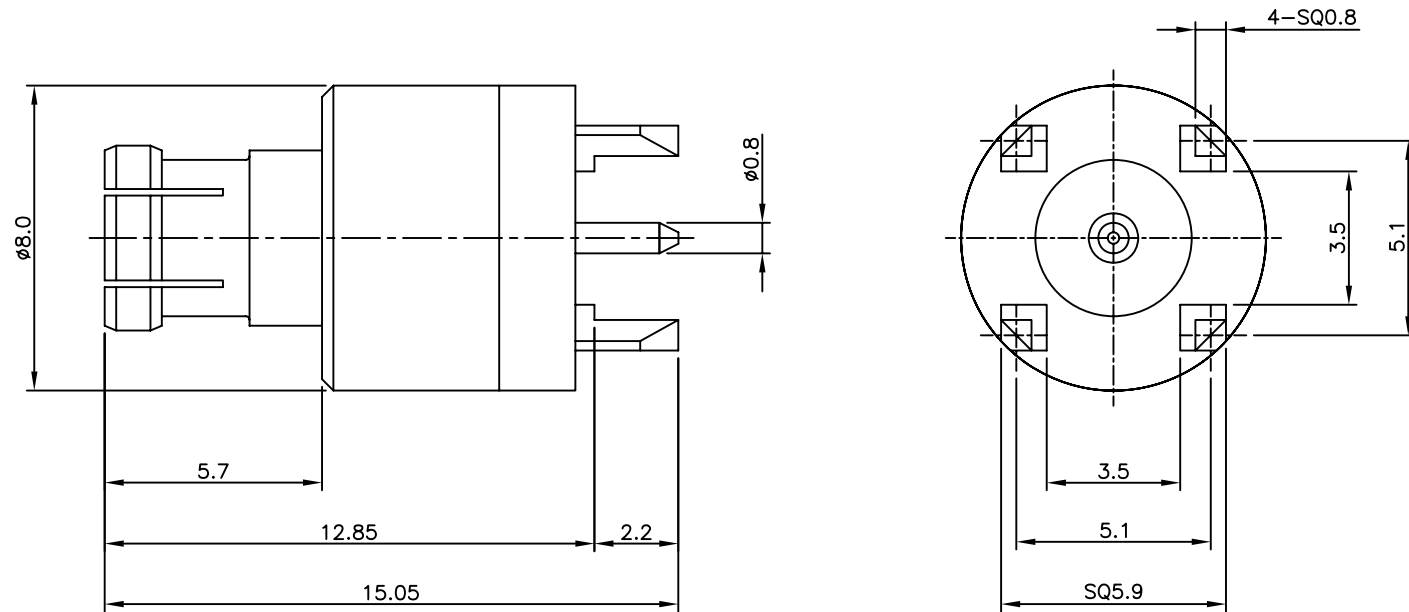

■ 놀림거리 : Max 0.7~0.9mm / 회전반경 : 5~6°

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2

8	SPRING	1	SUS	Passivated	DSR01168-5/5
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02302-5/2
6	INSULATOR	1	TEFLON		DIN03004-N/3
5	INSULATOR	1	TEFLON		DIN03020-N/3
4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT03806-5/3
3	CONTACT (A)	1	MBsBD C3604BD-F	Gold Plate	DCT03804-5/3
2	JACK BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04416-5/7
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04538-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 09. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE BMBC50 PCB PS-4R
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03873-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	