
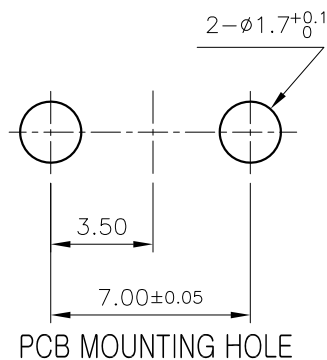


* 상대물 CN03592-7/1 과 삼.이탈력 체크 할 것.
삽입력 : 2~4Kgf
이탈력 : 5~8Kgf

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.06.02.

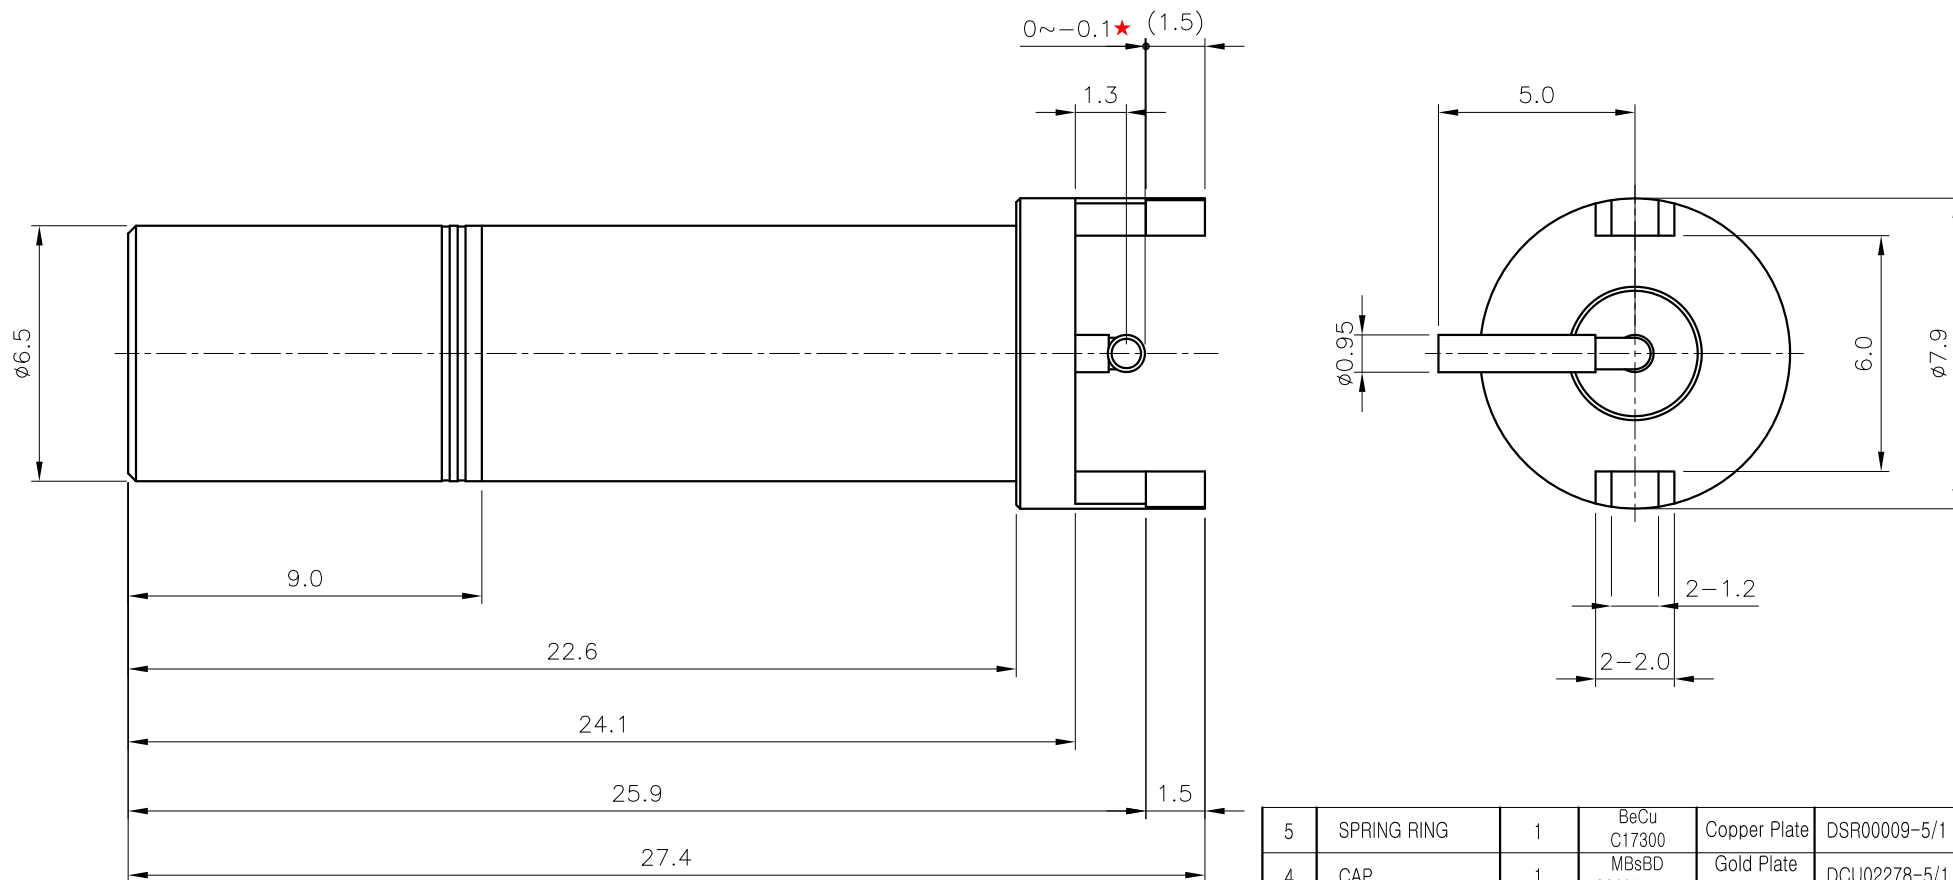

5	SPRING RING	1	BeCu C17300	Copper Plate	DSR00009-5/1
4	CAP	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5 μ m이상)	DCU02278-5/1
3	INSULATOR	1	TEFLON		DIN03360-N/1
2	CONTACT	1	BeCu C17300	Gold 0.4 μ m Plate	DCT04387-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5 μ m이상)	DBD04906-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 06. 02.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	
	Angle ±1°	APPROVED BY				
MATERIAL _____		CHECKED BY			TITLE SMB50 PCB PS-2R	
		DRAWN BY S.H.KIM				
FINISH _____		SCALE 5/1	UNIT mm		A4	DWG NO. CN04114-7/1
					REVISION I R	SHEET 1 of 1