
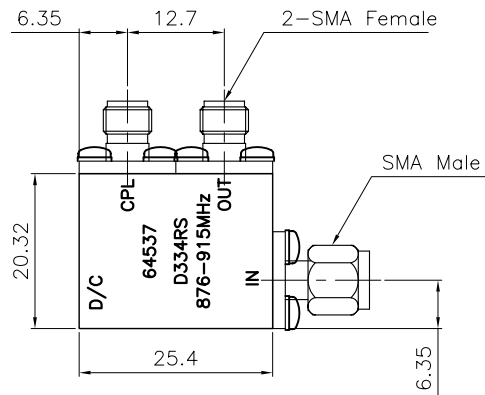


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED SILK PRINT	2004.03.16.

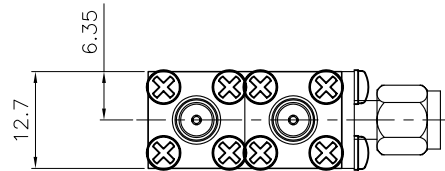

* ELECTRICAL SPECIFICATIONS
Frequency Range : 876.0 ~ 915.0MHz
Coupling Value : 10dB $\pm$ 0.75dB
Coupling Flatness : $\pm$ 0.15dB
Insertion Loss (Max.) : 0.66dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Gold Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	2004. 3. 16.						
	Angle	APPROVED BY						
			CHECKED BY			TITLE		
MATERIAL		DRAWN BY			10dB Directional Coupler			
A6061 T6								
FINISH	SCALE		UNIT		A4	DWG NO. DC00004-7/1		
White Chromate	1/1		mm			SHEET 1 OF 1		