


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.11.16.

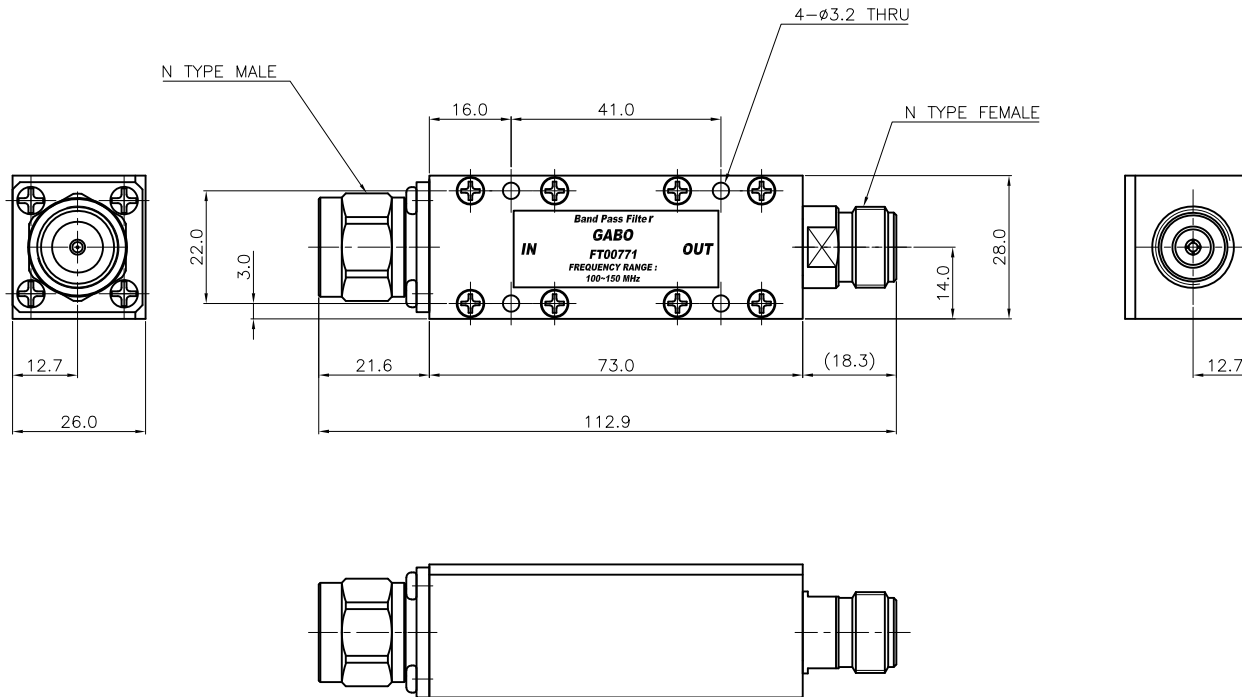

* ELECTRICAL SPECIFICATIONS

Parameter	Unit	Specification			Comments
Frequency	MHz	DC~70	100~150	190~2000	
In/Out VSWR	dB	-	1.5:1	-	Max.
Insertion Loss	dB	-	1.5	-	Max.
Flatness	dB	-	1	-	Max.
Rejection	dB	20	-	30	Min.
Handling Power	W	1			Max.
Impedance	Ω	50			

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : MBsBD (Gold Plate)

INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATION

-20°C ~ 70°C

TOLERANCE	Decimal ±0.3	DATE 2022. 11. 16.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle ±1°	APPROVED BY S.L.SON				
MATERIAL A6061 T6		CHECKED BY S.L.SON	TITLE Band Pass Filter			
		DRAWN BY K.S.KIM				
FINISH White Chromate	SCALE 1/1	UNIT mm		A3	DWG NO. FT00771-7/1	
					REVISION 1	SHEET 1 of 1