



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration (2018.03.07 주파수대역 추가)	S.L.SON	J.H.YOUN	2018.03.07.
2	LOSS 검사 주파수 표 제거	S.L.SON	J.H.YOUN	2020.10.12.

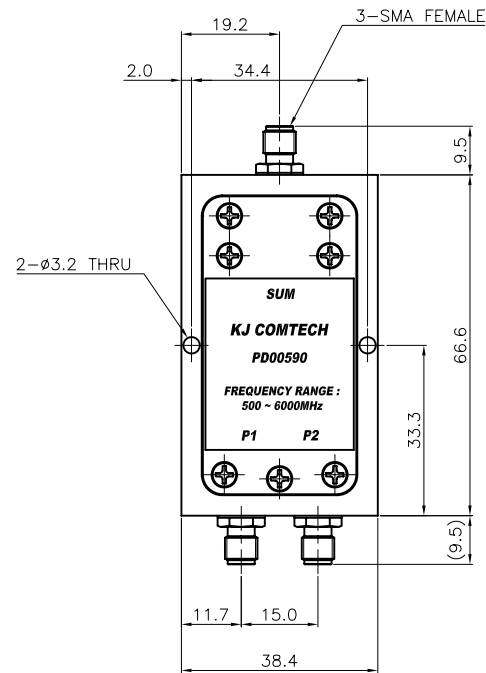

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500.0 ~ 6000.0MHz
V.S.W.R (Max.) :
5000 ~ 3000MHz : 1.4:1
3000 ~ 6000MHz : 1.5:1
Isolation (Min.) : 12.0dB
Power Handling (Max.) : 4.0W
Impedance : 50.0Ω
Insertion Loss(Max.) : 3.8dB

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE	2020. 10. 12.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.L.SON	
MATERIAL	A6061	CHECKED BY		TITLE 2WAY POWER DIVIDER
		DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	DWG NO. PD00590-7/2
		UNIT	mm	REVISION 2
				SHEET 1 of 1