




REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.12.04.
2	도금 및 LABEL 을 추가	S.L.SON	J.H.YOUN	2018.03.27.

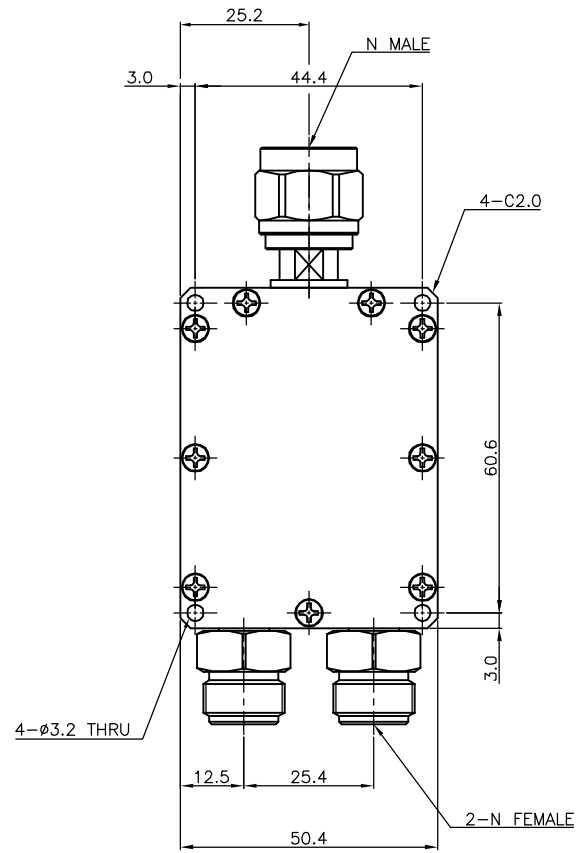

FRONT

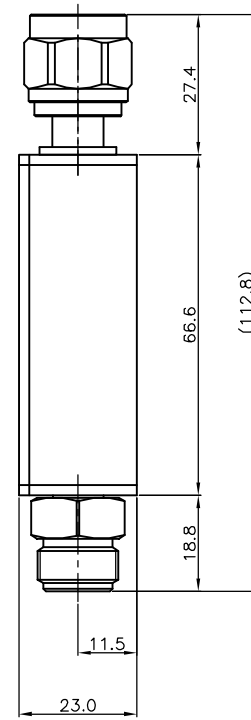

SIDE

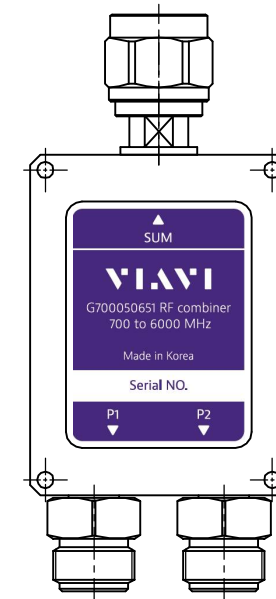

BACK

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~6000 MHz
Insertion Loss (Max.) : 3.9dB
V.S.W.R (Max.) : 1.5 : 1
Isolation (Min.) : 15.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Sanding)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2018. 03. 27.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		 TITLE 2WAY POWER DIVIDER
	A6061	DRAWN BY	S.L.SON	
FINISH	Sanding	SCALE	1/1	 DWG NO. PD00595-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	