
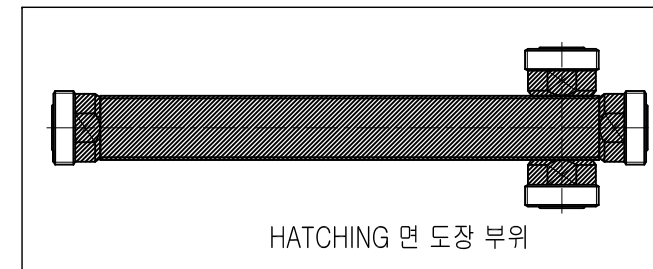


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.12.04.

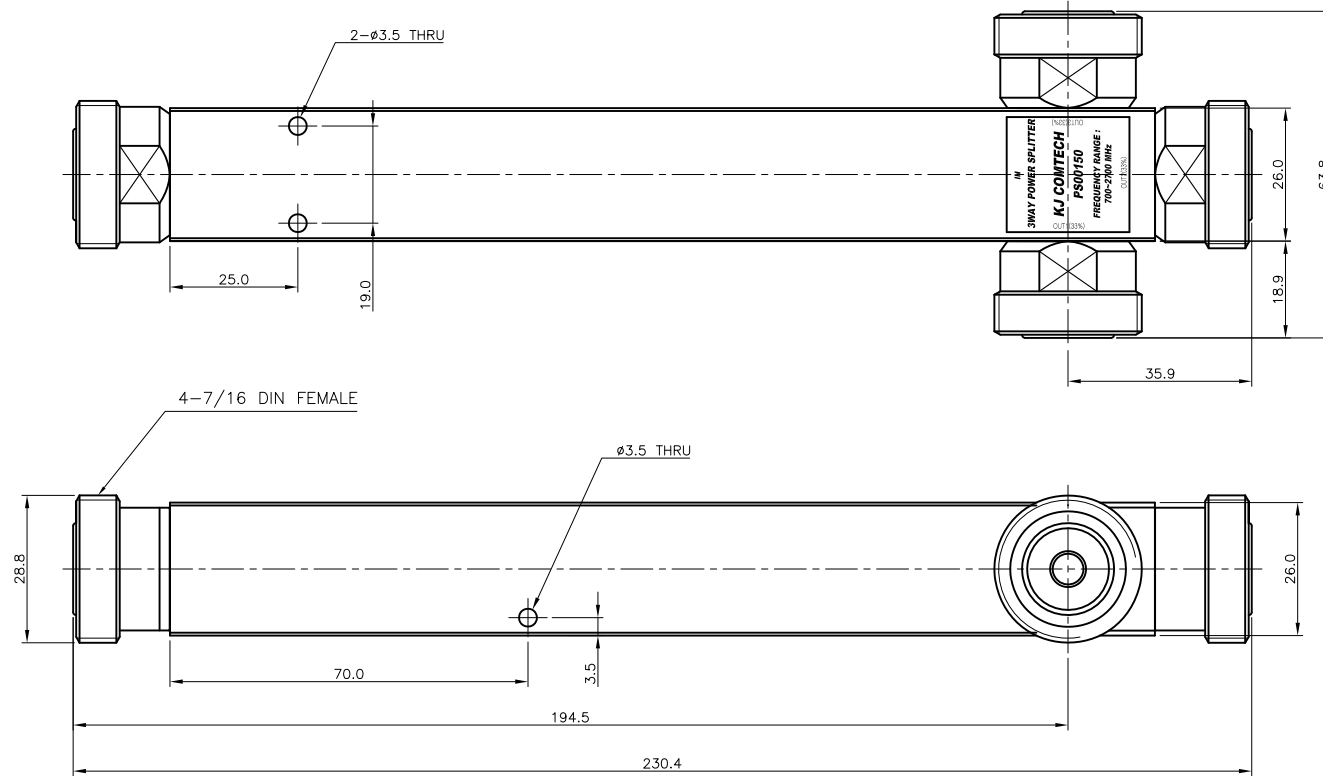

* ELECTRICAL SPECIFICATIONS
Frequency Range : 698 ~ 2700 MHz
Insertion Loss (Max.) : 5.2dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -160.0dBc
(@43.0dBm 2Tone)
Power Handling (Max.) : 300.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (DIC-547, Liquid Matt Texture)
CONNECTORS : MBsBD(C3604BD-F) (SUICO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
-40~+60 Degree
IP67

TOLERANCE	Decimal ±0.3 Angle ±1°	DATE 2019. 07. 30.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
MATERIAL	A6061	APPROVED BY J.H.YOUN	
FINISH DIC-547(Ivory)	SCALE 1/1	CHECKED BY S.L.SON	TITLE 3WAY POWER SPLITTER
UNIT mm		DWG NO. PS00150-6/2	SHEET 1 of 1